

InGateway 601 Intelligent Cellular Gateway

Cellular Routing, Text Message Alarms, Remote Secure Access













InGateway 601

The InGateway 601 series, integrating 3G cellular routing, Modbus data acquisition, text message (SMS) alarms and VPN technology into a compact industrial grade gateway, establishes a new standard in remote access. The IG601 is the total solution for any PLC or device.

As a part of InHand Networks' industrial cellular portfolio, the IG601 can ensure a reliable, secure connection to the 3G network. From the rugged design to the built in automatic recovery mechanisms, the IG601 can ensure critical applications stay connected. By providing a suite of VPN features, the IG601 guarantees data security.

The IG601 is not only cellular router, but also an intelligent gateway, supporting industrial protocols like Modbus over TCP/IP. The IG601 can monitor PLCs and equipment, and can send an alarm by text message if the user-defined conditions are triggered. It notifies response personnel immediately, in the field or in the office.

Working with the cloud based *InHand Device Touch*, the IG601 can build a secure tunnel to remote PLCs or machines. Engineers can access a PLC's serial or Ethernet port with its native software tools, allowing techs to program remote PLCs just as if the devices were by their side.

InGateway is the intelligent companion for your PLC or device.



Key Features

Rugged Design For Industrial Environment

- EMC levels 3, exceeding industrial standards
- Ethernet port : 1.5kv, Serial port: 15kv ESD protection
- Wide temperature range: -20°C ~ 70°C
- Wide input voltage range: 12 ~ 24VDC
- IP30 metal enclosure
- DIN rail or wall mounting bracket.

■ Cellular Routing

- Supports 3G Networks: HSPA+, EV-DO
- VPN: GRE, L2TP, PPTP, IPSec, OpenVPN, Certificates
- Firewall: Stateless Packet Inspection, Intrusion Protection, DDoSPrevention, IP to MAC binding, DMZ, Virtual IP Mapping
- VRRP

■ Remote Access

- Supports InHand Device Touch to build secure tunnel for remote PLC and machines
- Secure tunnel can be built on demand
- Operator access control and traceable historical records

■ Bi-directionalText Message Function

- SMS Inquiry and Control via Modbus overthe serial or Ethernet port
- Text Message Alarm, trigged by predefined criteria
- Intelligent white list function to improve security

Serial Port Networking

- Protocols converting between serial and Ethernet: Modbus RTU & TCP
- Supports multiple virtual serial links

Simplify Management

- Intuitive with web configuration interface
- Text Message to Inquiry Status, Reboot the IG601
- Support InHand Device Manager: centralized network management
- IG601 can be managed easily, whether for a single installation or large scale system



Specifications

IG601 Software Specifications

		IG601		
Networking	Cellular Standard	HSPA+/UMTS/EDGE/GPRS/GSM		
		CDMA 1xEVDO Rev.A/1xEVDO Rel0/1xRTT		
	Band Options	UMTS/HSPA+ 850/900/1800/1900/2100MHz		
		CDMA 800/1900MHz		
	Network Access	APN, VPDN, Access Authentication CHAP/PAP/MS-CHAP		
	IP	Ping, Trace, DHCP Server, DNS Relay, DDNS, Telnet		
	Networking Security	SPI, DDoS protection, Stateless Packet Inspection		
		Filtering Multicast/Ping package, Access Control List (ACL)		
Security		NAT, DMZ, Port mapping		
	Data Security	GRE, L2TP,PPTP, IPSec, OpenVPN, Certification		
	Management	HTTPS		
Reliability	Auto-Recovery	Hardware Watchdog		
	Link Status Detection	Reconnects automatically when link failure is detected.		
	Bi-directional Text	Broadcasts a text message when an alarm criteria is trigged		
	Message (SMS)	SMS Inquiry and Control: with authorized cellular number, to inquire		
	Functions	data, configure or control remote PLC/device		
Application Functions	Remote Maintenance	InHand Device Touch. Remote PLC programming via serial/Ethernet port		
	5	Acquire local data (via Modbus) and feed into monitoring center,		
	Data Acquisition	Support InHand Device Sense for a web-based SCADA interface		
	Configuration	Configure via Serial Port, Telnet, Web		
	Firmware Upgrade	Via Web interface or InHand Device Manager		
Network	Log	Local log, remote log, export log via serial port		
Management	Text Message (SMS)	Interactive text messaging, allowing SMS commands like 'Reboot' or 'Status.'		
	On-Demand Dial Up	Trigger by data on port, text message, or by predefined schedule		
InHand Device Cloud (Not included)	Device Manager	Centralized network management for thousands of devices. Bar configuration, bandwidth usage, connection status, location data.		
	Device Touch	Remote access PLC, virtual serial, dual VPN tunneling, OpenVPN wit TLS tunneling for anonymity and security		
	Device Sense	Remote monitoring, Real-time data, Simple web interface		




IG601Hardware Specifications

		IG601		
	Ethernet Port	One RJ45, 10/100 Mbps auto-sensing		
	Power Supply	3 pole Industrial Wiring Terminal		
		Input Voltage: 12 to 24VDC		
		Power Consumption: 200mA @ 24VDC		
Interface	Serial Port	RS-232/485, 5-pin Industrial Terminal Block Connector		
		Support isolated serial port		
	SIM Holder	Drawer Card Holder x1		
	Reset	Pinhole Reset Button		
	SMA connector	One Standard SMA Connector with Female Inner Pin		
Mechanical	Mounting	DIN-Rail, or wall mounted (additional accessory shall be ordered)		
	Dimension (mm)	80 x 45 x 90		
	Weight	340g		
Features	Enclosure	Metal		
	IP Level	IP30		
	Cooling	No Fan		
	Humidity	5 ~ 90% relative humidity (noncondensing)		
Environment	Storage Temperature	-40 ~ 85°C		
Temperature	Working Temperature	-20 ~ 70°C		
Indicators		POWER, STATUS, WARN, ERROR, MODEM, SIM, 3 Levels of Cellular Signal Strength		
		EN61000-4-2,level 3		
		EN61000-4-3,level 3		
		EN61000-4-4,level 3		
		EN61000-4-5,level 3		
EMC & Physical Specifications		EN61000-4-6,level 3		
		EN61000-4-12, level 3		
		EN61000-4-11, Voltage Dip: 70%		
		Shock Test: IEC60068-2-27		
		Free Fall: IEC60068-2-32		
		Vibration: IEC60068-2-6		




Applications

1. Secure Remote Connectivity

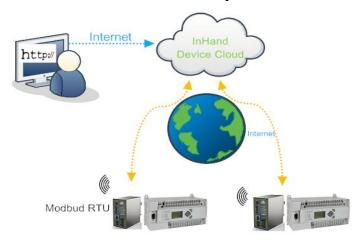

2. Easily manage your PLC by text message

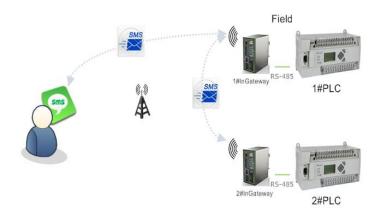

3. Remote Programming and Diagnostics



Reliable, Secure Remote Networking

Utilizing ubiquitous cellular networks, the IG601 helps you to connect your remote machines for remote monitoring, SCADA, equipment maintenance, vending operations, wind turbines, ATMs and more.

The IG601 ensures your equipment stays protected and connected.

Text-Messaging

The IG601 allows engineers to monitor their device, receive alarms, or even reboot the device via a short text message or SMS.

Get notified before equipment fails. Text-messaging ensures you stay connected.


InHand Device Touch

The InHand Device Touch Cloud allows technicians to remotely program, monitor and diagnose a PLC.


InHand Device Touch software is a one-click solution and provides all the security of a VPN without any complex VPN configuration InHand Device Touch is a simple, secure and powerful tool for the mobile age.



Dimensions (mm)

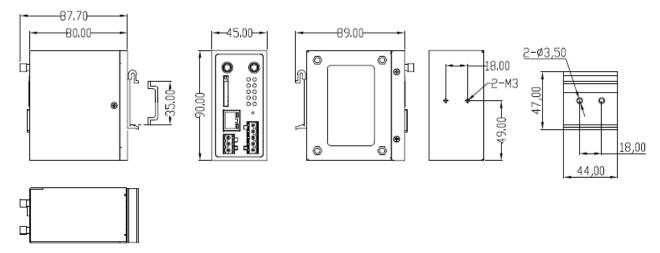

DIN-Rail Mount

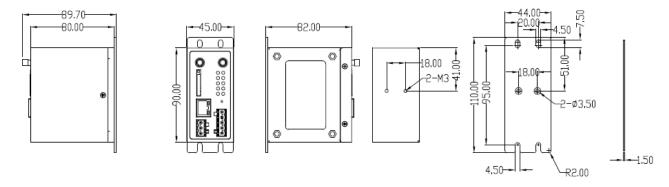

Wall Mount (Order accessory separately.)

Ordering Information

Features	InGateway601Part Number				
Part Number	IG601- <nw></nw>				
NI M	N = Network	P:HSPA+	V:EVDO	GPRS/CDMA	
N, W	W=Module	S08:Cinterion	S08:Cinterion	N/A	
		H09: Huawei			
Sample	IG601-PS08:supportsHSPA+ with a Cinterion/Gemalto module				
Accessory	Standard antenna included, external power supply or adapter not included				

^{*} Please contact InHand Networks for more update information.



InHand Networks

InHand Networks provides reliable, secured and intelligent M2M solution for electric power, industrial automation, commercial and medical devices. Recognized world by class customers and partners. Proven by a large install base. Expanding with investments intensive in research and development. Enduring for long-term support.

InHand Networks has become leader in industrial grade network technology by providing industrial cellular routers, industrial Ethernet switches, wireless sensor network devices and cloud based M2M platforms.

Connecting devices, enabling services.











InHand Networks

Headquarters

West Wing, 11th Floor, Qi Ming Mansion Wang Jing Science Park, Chao Yang District Beijing, 100102, China T:+86-10-6439-1099 F:+86-10-8417-0089 info@inhandnetworks.com

US Office

7926 Jones Branch Dr. Suite 110 McLean, Virginia 22102 USA T: +1-703-348-2988 F:+1-703-348-2988

www.inhandnetworks.com

7/7